



AB switch with variable boost and stereo buffers to drive two amplifiers with ground isolation.

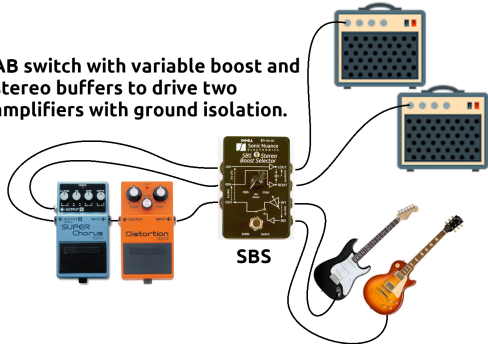


Some routing options of the SBS

"dry" path

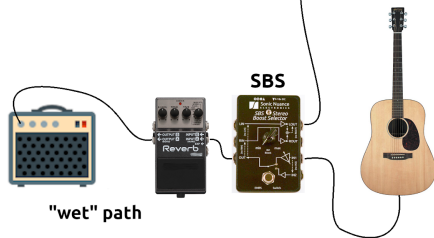

"wet" path

"Wet" + "dry" tone with selectable boost and ground isolation between amps

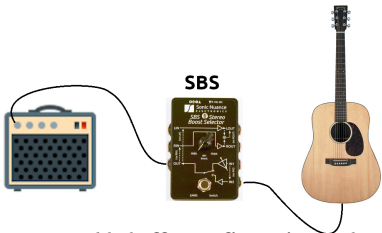

Mutable buffer configuration. Selecting IN1 mutes output and allows unplugging instrument to save battery life



SBS



Two channel mixer with selectable boost and isolated output



Introducing the Sonic Nuance SBS (Selectable Boost Selector)

Features:

- 0-15dB selectable boost
- Low noise, quality buffers
- Mechanical relay soft switch
- Can drive up to 300ft of cable
- Transformer isolated output
- Durable powdercoat finish
- 9V to 18V operation
- Super bright LEDs
- DC output jack